


AUSFÜHRUNG

Gehäuse und Winkelprofil 35/3 aus verzinktem Stahlblech. Kulissen 100mm. Absorptionsmaterial Mineralwolle; durch Luftströmung beanspruchte Flächen mit Glasvlies geschützt; einsetzbar bis 20m/s Luftgeschwindigkeit; nicht brennbar DIN 4102.

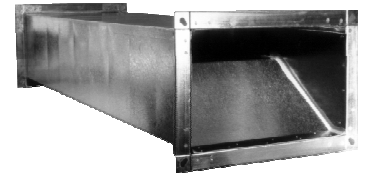


NKG EINFÜGUNGSDÄMPFUNG

Höhe	Breite	63	125	250	500	1K	2K	4K	8K	dB(A)
200	300	1	4	11	12	7	7	6	6	14
200	600	1	4	11	12	7	7	6	6	14
200	1000	1	4	11	12	7	7	6	6	14
250	300	1	5	10	12	6	6	5	7	13
250	500	1	5	10	12	6	6	5	7	13
250	1000	1	4	9	11	7	6	5	6	13
300	300	1	5	11	11	7	7	6	7	13
300	700	1	5	10	12	6	6	5	6	13
300	1000	1	5	11	11	6	6	5	6	13
350	300	1	3	10	12	6	6	5	5	13
350	600	1	3	10	12	6	6	5	5	13
350	900	1	3	9	11	6	6	3	5	12
400	300	2	4	11	12	7	7	6	5	14
400	600	2	4	11	12	7	7	6	5	14
400	1000	2	4	11	12	7	7	6	5	14
450	500	1	3	8	11	6	6	5	4	13
450	700	1	3	8	11	6	6	5	4	13
450	1000	1	3	8	9	5	5	3	4	11
500	500	1	3	9	11	6	5	4	3	12
500	700	1	3	9	11	6	5	4	3	12
500	1000	1	3	9	11	6	5	4	3	12

NKG Zusatzschalldämpfer

ABMESSUNGEN

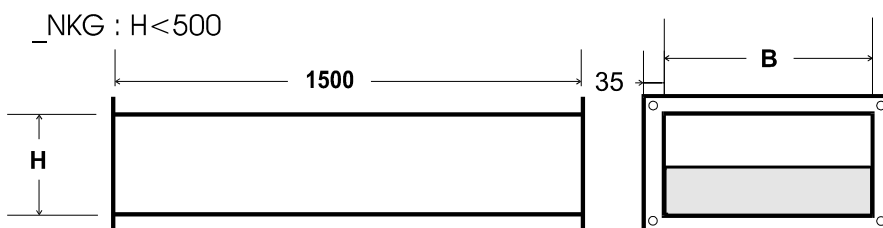

Connection/ Anschluß
SMB 20mm & SMB 30mm.

